

PRODUCT DATA SHEET

OUTDOOR PATIO HEATER

Waterproof: IPX4

Safe: Overheat protection

Quick heating: 5 minutes

Economical: No maintenance cost

Highest heating efficiency: 99.99%G



Energy saving: Uniform heat distribution. No heat loss

Heating element: Ferrochromium wire with outer stainless steel tube

Certification: CE , SAA, CCC

Design style: German Design Black Heatstrip

Supplier:	Infracomfort NZ Limited
Email:	derek@infracomfort.co.nz pat@infracomfort.co.nz
Phone	Derek 0274 775987 / Pat 021 434343
	www.infracomfort.co.nz

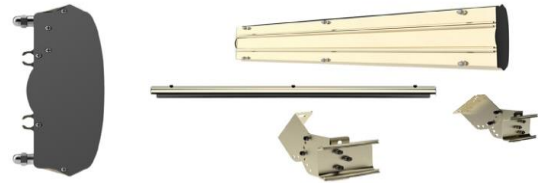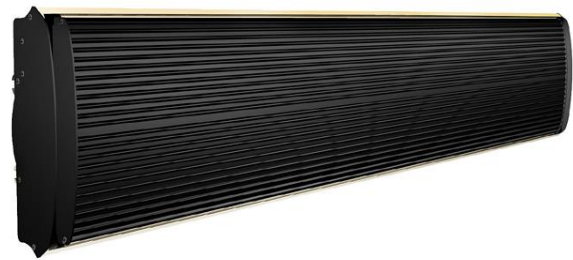

Model	Power	Cover area	Voltage Frequency	Rated current	Surface temperature	Dimension (mm)	N/G weight(kg)	Container load Q'ty (20'/40'/40HQ)
GT-10A	1000W	10 m ²	230V,50/60HZ	4.3A	380°C	600*189*67	4.3/5	1008/2088/2320
GT-18A	1800W	20 m ²		7.8A		1000*189*67	6.5/7.2	639/1359/1510
GT-24A	2400W	30 m ²		10.4A		1500*189*67	9.7/10.6	468/963/1070
GT-32A	3200W	40 m ²		13.9A		2000*189*67	13.2/14.8	401/812/935

